



**ADDENDUM #1
JANUARY 8, 2014**

**MOSS ROAD IMPROVEMENTS
Bid # ITB-002/14/BF**

TO: ALL PLAN HOLDERS

This Addendum No. 1 to the Contract Documents for City of Winter Springs project "Moss Road Improvements" is hereby declared a part of the original Contract Documents dated December 2013, and in the case of conflict, the following Addendum No. 1 shall govern. **Bidders shall acknowledge receipt of this Addendum on the Bid Form.**


Project Manual:

1. Section 00300 - Bid Form:

Delete Section 00300 (4 pages) and replace with Section 00300 (4 pages) attached hereto and annotated as "ADDENDUM #1"

The changes to Section 00300 are summarized as follows:

- a. Added pay item #35, "Remove and Replace Existing Miami Curb" and added a corresponding pay item note

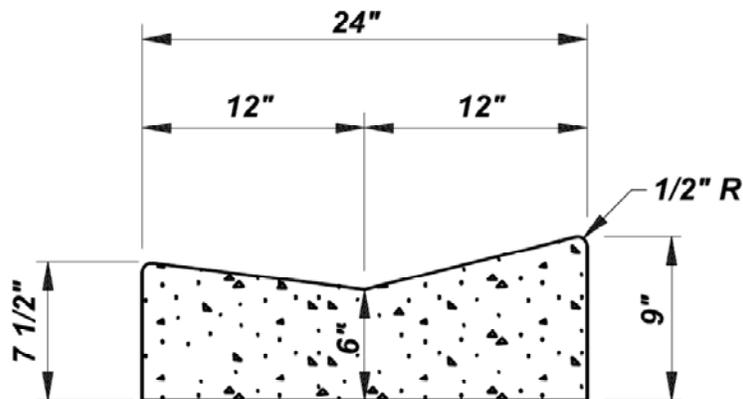

Miami Curb Detail

END ADDENDUM

ADDENDUM #1

SECTION 00300

BID FORM

I. GENERAL

1.01 Description

The following Bid is hereby made to the City of Winter Springs, hereafter called the OWNER. Bid is submitted by:

Legal Name (indicate whether sole proprietorship, partnership, or corporation):

Address:

Contact Name:

Contact Phone Number:

Contact E-Mail Address:

1.02 The Undersigned:

A. Acknowledges receipt of:

1. Project Manual for Moss Road Improvements dated December 2013
2. Moss Road Improvements - Drawings
3. Addenda:

Number _____, dated _____.

Number _____, dated _____.

B. Has examined the site and all Bidding Documents and understands that in submitting his Bid, he waives all right to plead any misunderstanding regarding the same.

C. Agrees:

1. To hold this Bid open for 60 calendar days after the bid opening date.

2. To accept the provisions of the Instructions to Bidders regarding disposition of Bid Security.
3. To enter into and execute a contract with the OWNER, if awarded on the basis of this Bid.
4. To accomplish the work in accordance with the contract documents.
5. To complete the work within **90** calendar days of date of the Notice to Proceed (Final Completion)

1.03 Stipulated Amount

A. Base Bid

I will provide the services under this project for a Total Base Bid Amount of:

_____ Dollars (\$ _____).

The Bidder hereby agrees to perform all work as required by the Contract Documents for the following Unit Prices. All work required to be performed by the Contract Documents is to be included within the following Pay Items, inclusive of furnishing all manpower, equipment, materials and performance of all operations relative to construction of the project. Work for which there is not a Pay Item will be considered incidental to the Contract and no additional compensation will be allowed. The OWNER, at his sole option and discretion, may choose to add or deduct from the contract work at the unit prices set forth below. The Bidder shall be paid for actual quantities completed in accordance with the Contract Documents. The following is the order of precedence which will be used in case of conflicts within the Bid Schedule provided by each Bidder: Unit Price, Total Price, Total Base Bid (See attached Bid Form).

1.04 Bid Schedule

- A. Proposals (Bids) must be submitted in triplicate on the Bid Form
- B. I have attached the required Bid Security to this Bid
- C. I have attached a list of all subcontractors I will utilize for the Contract work

1.05 Submittal

RESPECTFULLY SUBMITTED, signed and sealed this ____ day of _____, 2014.

Bidder

By _____ Title _____

ATTEST: SECRETARY

SEAL

**Moss Road Improvements - Bid Form
ADDENDUM #1**

Pay Item	Description	Unit	Qty	Unit Price	Total
1	Mobilization	LS	1		
2	Maintenance of Traffic	LS	1		
3	Erosion Control	LS	1		
4	Mill Entire Asphalt Surface (3-inch avg. depth) and Recompact Base	SY	1,820		
5	Asphalt Milling (1.75-inch avg. depth)	SY	7,875		
6	Remove Asphalt, Base, and Sub-Base (min. depth 30-inches) at Landscaped Median	SY	610		
7	Replace Traffic Signal Loop	EA	2		
8	Install Roadway Base and Subbase at Bank Driveway	SY	45		
9	Superpave Type SP 12.5, Traffic Level C	TN	1,000		
10	Type B Curb at Landscape Median Section	LF	740		
11	Type B Curb at Paver Median Section	LF	440		
12	Curb Ramp	EA	8		
13	Concrete Valley Gutter	LF	115		
14	2" PVC Irrigation Sleeve	LF	250		
15	Concrete Sidewalk (5-feet wide, 4" thick)	SY	30		
16	Storm Inlet Repair at Excelsior Parkway	LS	1		
17	Concrete Ribbon Curb - Roadway Edge	LF	1,950		
18	Concrete Ribbon Curn - Medians	LF	85		
19	Remove Existing Sidewalk	SY	6		
20	Brick Pavers at Medians	SF	750		
21	Detectable Warning Mats	EA	20		
22	Bahia Sod	SY	2,000		
23	Install New Sign	EA	15		
24	Relocate Existing Sign	EA	4		
25	Decorative Cosswalk Striping - Traffic Patterns	SF	730		
26	Thermoplastic Striping - 6" Solid White	LF	530		
27	Thermoplastic Striping - 12" Solid White	LF	330		
28	Thermoplastic Striping - 18" Solid White	LF	38		
29	Thermoplastic Striping - 24" Solid White	LF	76		
30	Thermoplastic Striping - 6" Solid Yellow	LF	70		
31	Thermoplastic Striping - White Turn Arrows	EA	12		
32	Yellow Median Paint and RPMs	LS	1		
33	Topsoil at Landscaped Medians	CY	450		
34	As-Built Survey	LS	1		
35	Remove and Replace Existing 24-inch Miami Curb	LF	200		
TOTAL BASE BID (SUM OF ITEMS 1-35):					

**Moss Road Improvements - Bid Form
ADDENDUM #1**

Pay Item Notes:	
General	The Contractor's attention is called to the fact that the quotations for the various items of Work are intended to establish a total price for completing the Work in its entirety. Should the Contractor feel that the cost for any item of Work has not been established by the Bid Form or Payment Items, he shall include the cost for that Work in some other applicable bid item, so that his proposal for the Project does reflect his total price for completing the Work in its entirety.
General	All new sidewalks, crosswalks, driveways, and curb ramps shall meet ADA requirements
1	The lump sum price for mobilization shall not be more than 5% of the Total Base Bid.
4	Roadway base recompaction shall consist of proof-rolling the existing base to provide a stable and unyielding condition. Proof-rolling shall consist of compaction with a large diameter static drum roller having a drum weight of at least 10 tons.
4, 5, 6	Contractor is responsible for haul off and proper disposal of all millings and other excavated materials
7	Traffic Signal Loop replacement consists of a complete installation including coordination with Seminole County Traffic Engineering
8	The bank driveway shall be open for two-way traffic during bank operating hours
9	New asphalt shall be rolled such that it is between zero and 1/4" above adjacent curb gutters (or ribbon curb)
12	Line item applies to new and rebuild curb ramps, including any demolition and excavation; line item does not included detectable warning mats
13	Line item includes removal of existing curb and/or valley gutter where shown
14	Irrigation sleeves may be installed by open cur or directional bore
16	Line item includes all work required for a complete storm inlet repair per the detail
18	Concrete ribbon curb at medians to be 12" wide x 6" deep, similar to the detail on Sheet C-6. This curb is to be installed adjacent to the brick pavers along the straight line separating the pavers from the landscaped areas. This item is not called out on the plans.
20	Brick pavers shall be McNear - Old California Series in Red Hills color, or approved equal. Line item includes leveling sand
35	Remove and replace existing 24-inch Miami curb at various locations on Moss Road as directed by the City. The segments to be replaced will be at least 10-feet long. Miami curb shall be per the detail shown in Addendum 1.